
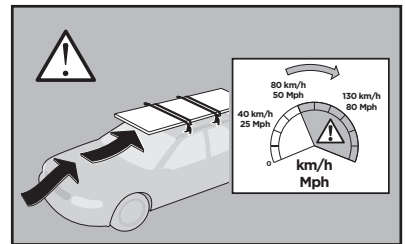
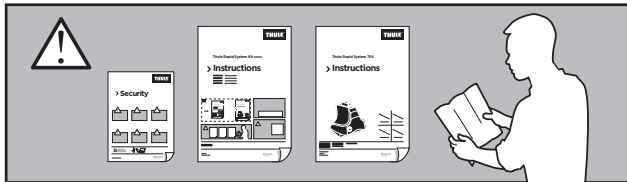
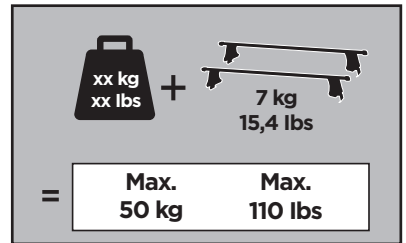


Thule Rapid System Kit 1629

> Instructions

KIA K5, 4-dr Sedan, 11-15

KIA Optima, 4-dr Sedan, 11-15

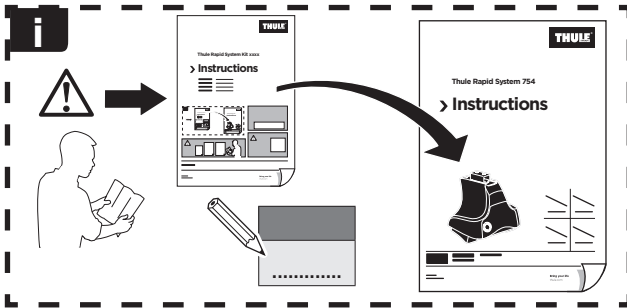

ISO 11154-E

141629


C.20150811
519-1629-02

Bring your life

thule.com



- 235 x1
- 236 x1
- 370 x1
- 371 x1



1178 x 2



x1





1179 x 2



x1

1



	X (scale)	X (mm)	X (inch)
KIA K5 , 4-dr Sedan, 11-15	43,5	1086	42 ³ / ₄
KIA Optima , 4-dr Sedan, 11-15	43,5	1086	42 ³ / ₄

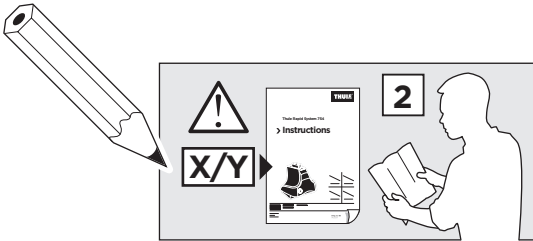


	Y (scale)	Y (mm)	Y (inch)
KIA K5 , 4-dr Sedan, 11-15	38,5	1036	40 ³ / ₄
KIA Optima , 4-dr Sedan, 11-15	38,5	1036	40 ³ / ₄

2

KIA K5, 4-dr Sedan, 11-15
KIA Optima, 4-dr Sedan, 11-15

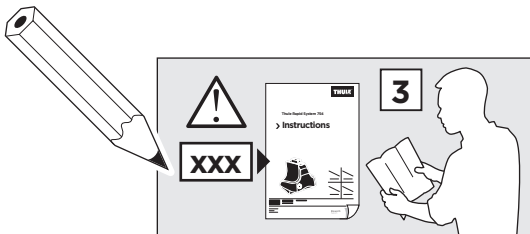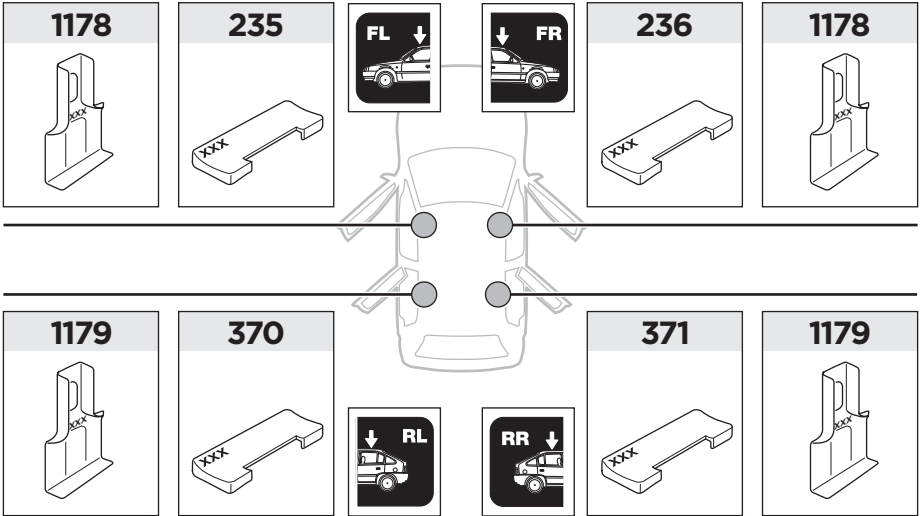

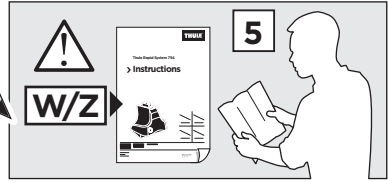3

	W (mm)	Z (mm)	W (inch)	Z (inch)
KIA K5, 4-dr Sedan, 11-15	230	665	9	26 ¹/₈
KIA Optima, 4-dr Sedan, 11-15	230	665	9	26 ¹/₈

